

# DNA™ 120 Bifacial

Solar for Innovators

Residential | Commercial | Utility

## Designed & Engineered in Silicon Valley 370W | 365W | 360W

Our DNA Split-cell Series impressively combines advanced technologies to maximize performance. Produce up to 30% more energy with the bi-facial rear side generation. Our patented DNA, Dual Nano Absorber, technology allows for panel to harvest energy from all directions and operate exceptionally in high heat temperatures.



Produce up to 30% more energy with rear-side generation



Advanced split cell technology with 9 ultra-thin busbars allows for less resistance and more photon capture



Ideal solution for applications affected by shading



All-black design for pristine aesthetics  
No excessive silver bussing or ribbons



Robust product design is resilient in extreme weather. Up to 5400 Pa snow load and 6200 Pa Wind Load

30 Year  
Warranty


3X IEC  
Standards

RETC Top  
Performer



2081 Business Center Drive, Ste 100  
Irvine, CA 92612  
[www.aptossolar.com](http://www.aptossolar.com)  
[info@aptossolar.com](mailto:info@aptossolar.com)

## Linear Performance Warranty

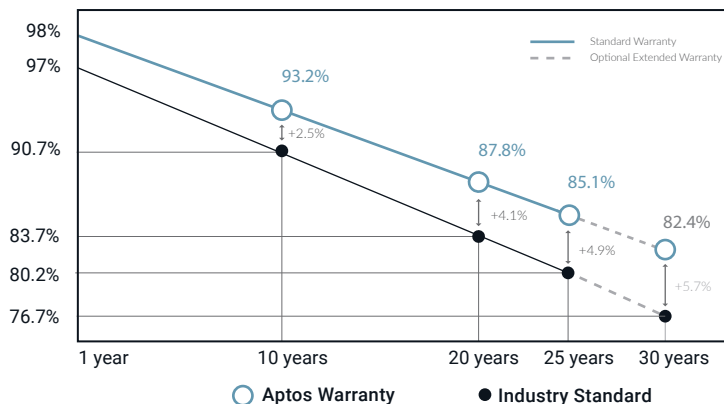



## Electrical Specifications

	DNA-120-BF26-360W	DNA-120-BF26-365W	DNA-120-BF26-370W
STC Rated Output $P_{mpp}$ (W)	360W	365W	370W
Module Efficiency	19.73%	20.01%	20.28%
Open Circuit Voltage $V_{oc}$ (V)	40.8	41.1	41.4
Short Circuit Current $I_{sc}$ (A)	11.12	11.19	11.26
Rated Voltage $V_{mmp}$ (V)	34.0	34.3	34.5
Rated Current $I_{mmp}$ (A)	10.59	10.66	10.72

Standard Test Conditions for front-face of panel: 1000 W/m<sup>2</sup>, 25°C, measurement uncertainty  $\leq 3\%$

## Temperature Coefficients

Temperature Coefficients $P_{mmp}$	-0.36%
Temperature Coefficients $I_{sc}$	+0.0449%/°C
Temperature Coefficients $V_{oc}$	-0.28%/°C
Normal Operating Cell Temperature (NOCT)	45°C

## Test Operating Conditions

Maximum Series Fuse	20A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL 1703)	5400 Pa Snow Load / 6200 Pa Wind Load
Fire Performance Class	Class C/Type 1

## Packaging Configuration

Number of Modules per Pallet	31
Number of Pallets per 40ft. Container	26
Pallet Dimensions	1780 X 1125 X 1171 mm
Pallet Weight (kg)	653
Number of Modules per 40ft Container	806


## Certifications



## Mechanical Properties

Cell Type	Monocrystalline
Glass	3.2mm, anti-reflection coating, high transmission, low iron, tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68
Dimensions	1756 X 1039 X 35mm, 69.1 X 40.9 X 1.3in
Output Cable	4mm <sup>2</sup> (EU)12AWG
Weight	(19.5kg)
Cable Length	1200mm, MC4
Encapsulant	EVA/POE

## I-V Curve

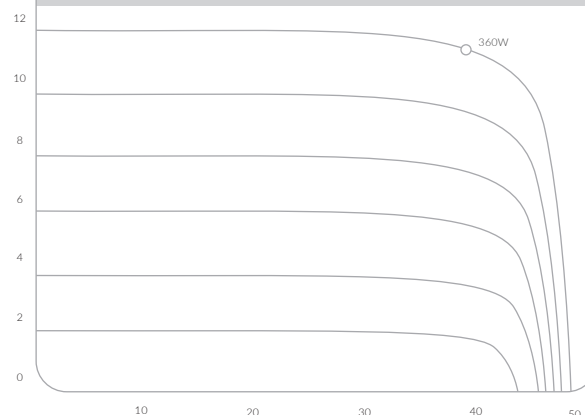

## Bifacial Output

$P_{mpp}$ (W) at STC	360	365	370
Bi-facial Boost 5%	378	383	389
Bi-facial Boost 10%	414	420	426
Bi-facial Boost 15%	450	456	463